


VERSION

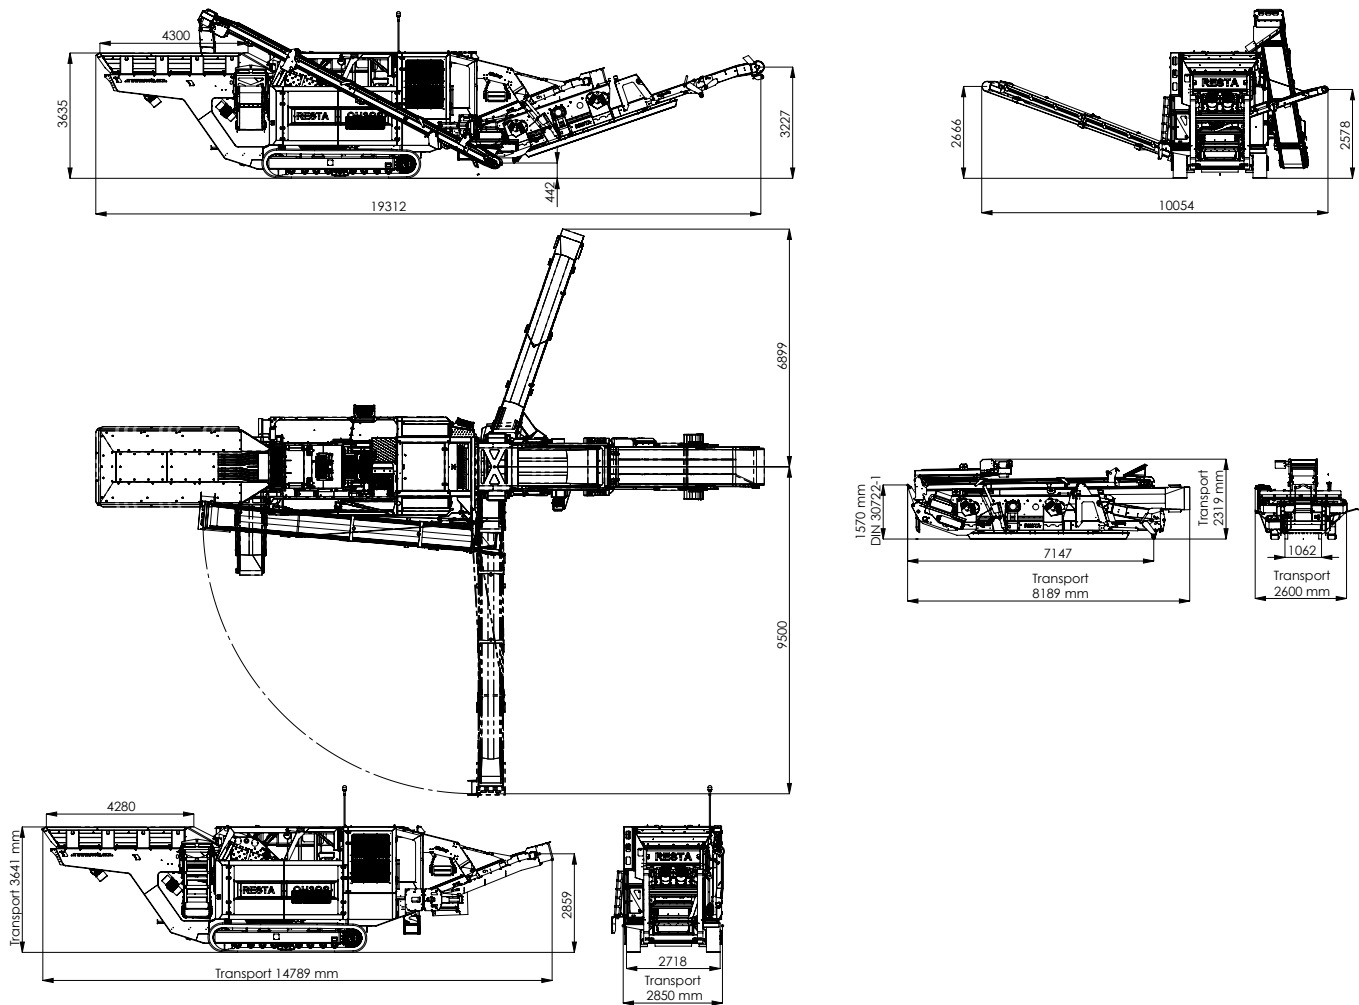

RESTA s.r.o


Contact: Kojetínská 3120/75
750 02 Přerov
Czech Republic

Company identification: CRN: 14616807
TIN: CZ14616807

GPS: 49.4435458 N, 17.4361281 E

+420 581 741 811
Fax +420 581 299 958
resta@resta.cz

www.resta.cz

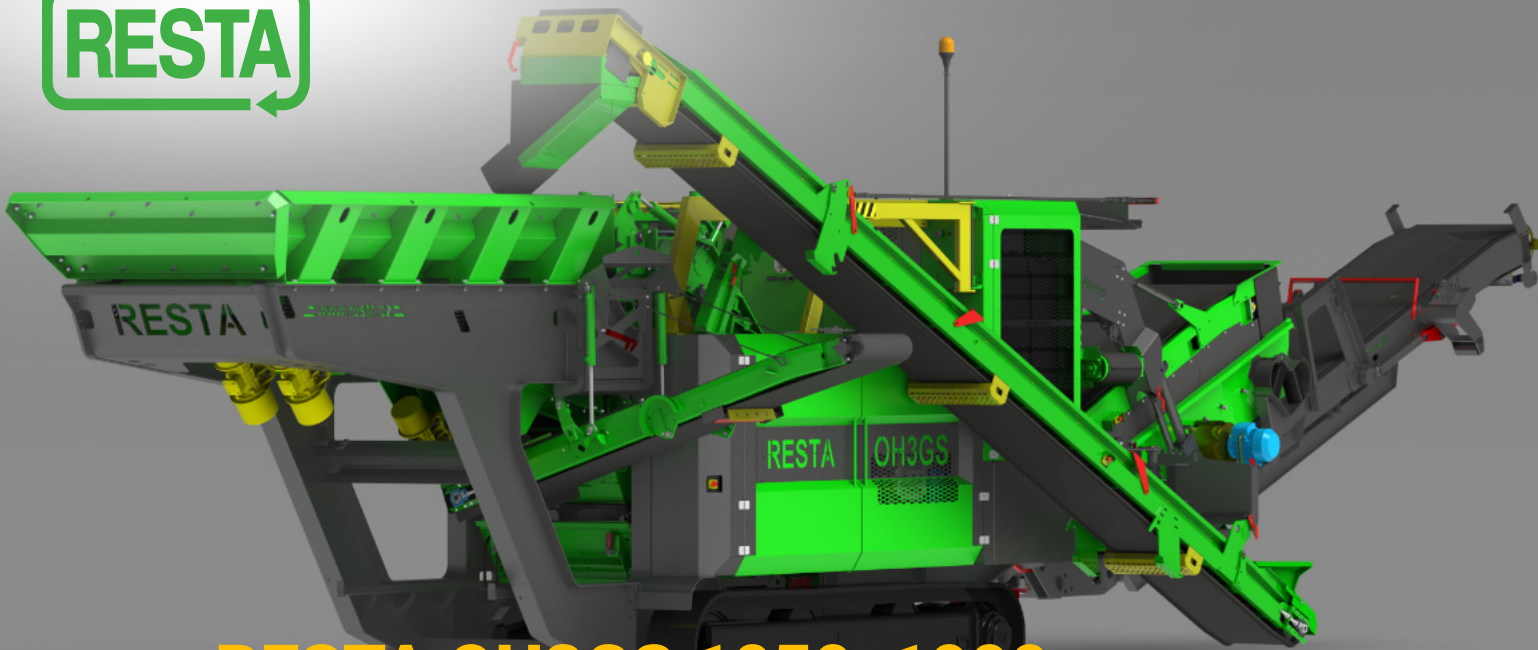

RESTA OH3GS 1050x1000

Mobile horizontal impact crusher

- Impact crusher
- Remote control
- Remote data
- Plug in
- Scale
- Eco-friendly
- Attached screener
- Magnetic separator
- Lighting
- Scalping belt
- Close side setting
- Scalping
- Diesel electric
- Dust supression
- Operator shelter

Max. feed size	800 mm, kamenivo 400 mm
Final product	0-32 mm, 0-80 mm (dle nastavení drtiče)
Throughput	80-200 t/h
Hopper	6 m³
Screener	T 1200 x 3000 1 - 2 decks
Weight	39 t (44-45 t) according to specification

DESIGNED FOR:

- reinforced concrete
- concrete
- construction waste
- bituminous blocks
- natural aggregate up to 250 MPa



RESTA s.r.o.
CRN: 14616807
TIN: CZ 14616807

Kojetínská 3120/75
750 02 Přerov
Czech Republic

resta@resta.cz
+420 581 741 811

www.resta.cz






RESTA s.r.o.
CRN: 14616807
TIN: CZ 14616807

Kojetínská 3120/75
750 02 Přerov
Czech Republic

resta@resta.cz
+420 581 741 811

www.resta.cz

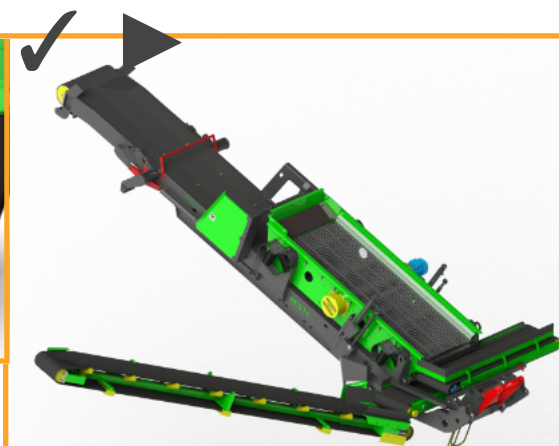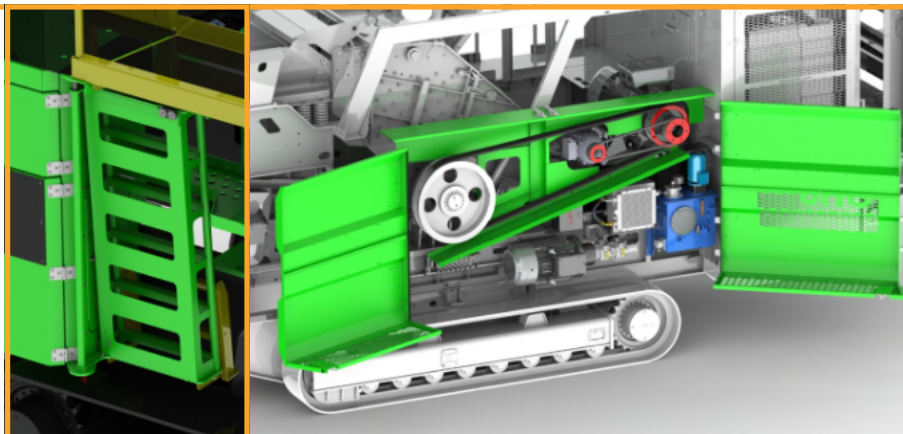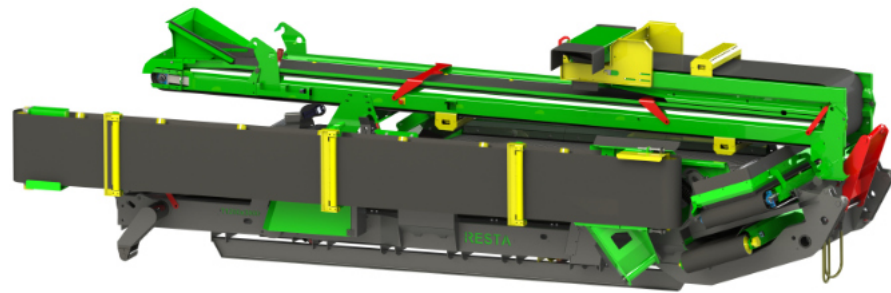

Operation

- ✓ semi-automatic control
- ✓ easy and safe access to all operation and service points
- ✓ operator shelter option
- ✓ fine proportional control of tracked undercarriage
- ✓ double-geared undercarriage

Diesel genset

- ✓ low fuel consumption
- ✓ option to use external power supply
- ✓ double sealing of switchboard
- ✓ user-friendly

Suspended screener



- ✓ container design
- ✓ option to use both one-deck or two-deck screener (according to used container)
- ✓ easy assembly – disassembly – transport
- ✓ easy access to the screen decks

Maintenance and service

- ✓ clean compact design
- ✓ easy access
- ✓ simplicity

Movable live output chute of the crusher

- ✓ movable feeder
- ✓ easy maintenance access underneath the crusher conveyor belt protection
- ✓ low wear easy replacement of liners
- ✓ low service costs

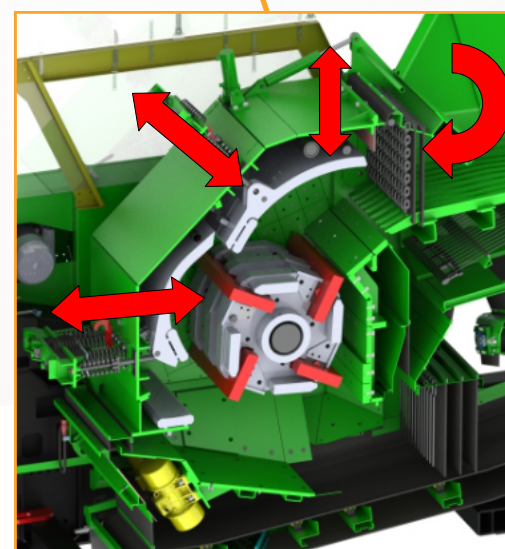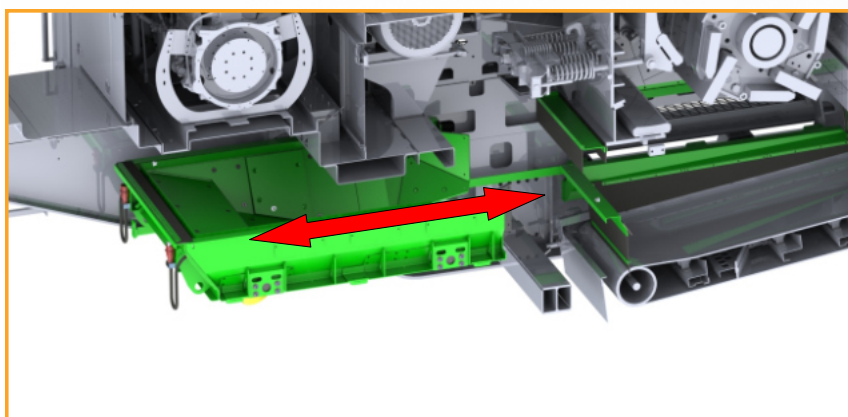

Crusher setting

- ✓ easy setting of impact plates for optimal crushing
- ✓ setting of both ends of the input impact plate
- ✓ option to limit oversized feed pieces by flap setting
- ✓ safe jam release by a hydraulic ram and movable impact plate
- ✓ ceramic impact bars
- ✓ easy impact plates setting without using tools

Hopper and feeder

- ✓ large feeding hopper with low tipping height
- ✓ feeder with fluent feeding regulation
- ✓ scalper with its own excitation and with two-step scalping



Side belt for scalped product

- ✓ attachable to both sides of machine
- ✓ user-friendly
- ✓ in transport position, it does not restrict access to the crusher

