



# VERSION



## Working position

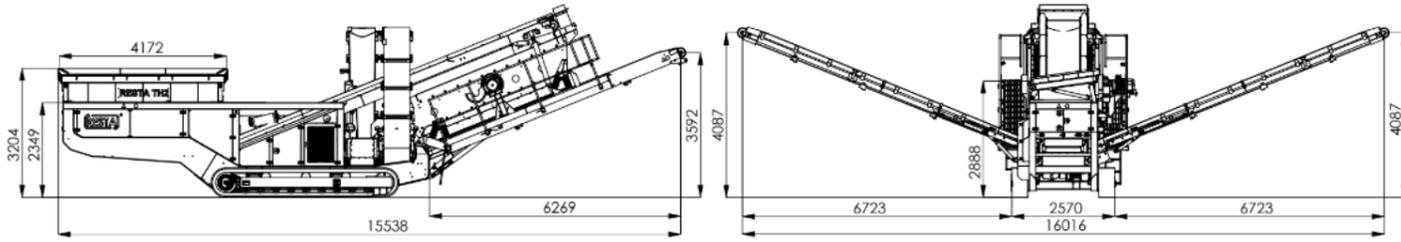

## Transport position

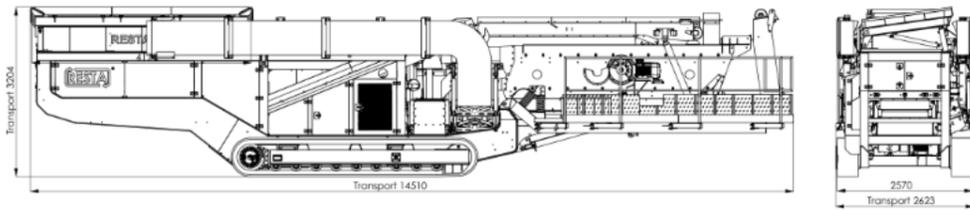

**RESTA TH2 1600x4000**  
Mobile screener

## RESTA s.r.o

### Contact:

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic

+420 581 741 811  
Fax +420 581 299 958  
rest@resta.cz

### Company identification:

CRN: 14616807  
TIN: CZ14616807

GPS: 49.4435458 N, 17.4361281 E



[www.resta.cz](http://www.resta.cz)



<b>Max. feed size</b>	max. 900 mm
<b>Final product</b>	3+1 final products (according to used meshes)
<b>Throughput</b>	150 - 270 t/h
<b>Hopper</b>	7 m <sup>3</sup>
<b>Weight</b>	26 t

### DESIGNED FOR:



RESTA s.r.o.  
CRN: 14616807  
TIN: CZ 14616807

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic

rest@resta.cz  
+420 581 741 811

[www.resta.cz](http://www.resta.cz)






RESTA s.r.o.  
CRN: 14616807  
TIN: CZ 14616807

Kojetínská 3120/75  
750 02 Přerov  
Czech Republic

rest@resta.cz  
+420 581 741 811

[www.resta.cz](http://www.resta.cz)

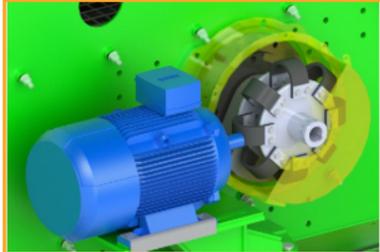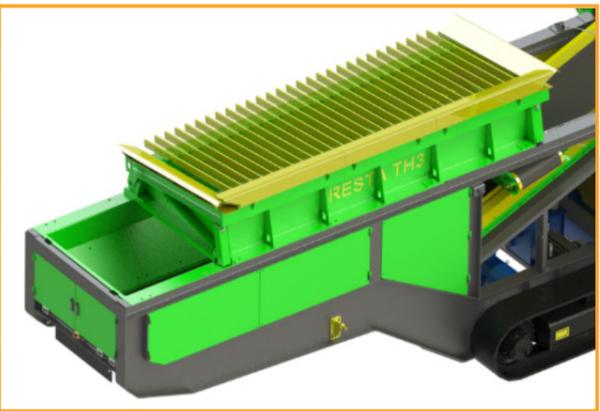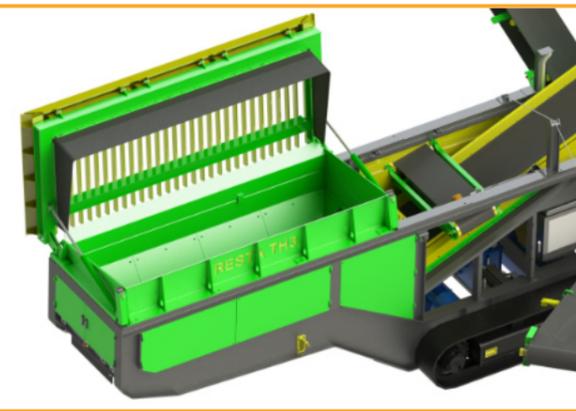

### Maintenance and service

- ✓ easy maintenance thanks to electrical drives
- ✓ bearings with lifelong grease
- ✓ small amount of operation liquids
- ✓ easily serviceable screener clutch and electrical motor

### Screener

- ✓ fluent regulation of the vibrator speed
- ✓ high operation liability
- ✓ high performance and rugged structure
- ✓ easy replacement of spare parts
- ✓ all meshes are tensioned transversally
- ✓ option of screener inclination from 18° to 22°

### Hopper with grid

- ✓ remote controlled hydraulically tilting grid
- ✓ flying bars for easy grid cleaning
- ✓ exchangeable liners
- ✓ adjustable damping flap on the inlet
- ✓ option to shift the hopper for easier crusher loading
- ✓ adjustable tipping grid inclination
- ✓ fluent feeding regulation
- ✓ Nord gearbox

### Transport

- ✓ rapid setup into operation from transport position
- ✓ easy handling
- ✓ remote control

### Control panel

- ✓ easy control
- ✓ double sealing of the control panel
- ✓ mains supply or from generator set
- ✓ lighting

### Operation

- ✓ rapid setup into operation from transport position
- ✓ 3 + 1 final products
- ✓ high lifetime thanks to minimization of hydraulic system
- ✓ low operating costs due to electrical drives
- ✓ option to change working angle of the screener
- ✓ magnetic separator
- ✓ dust suppression

